


> Mechanical Specification:

(1) Dimension

- Chip size: 8mil x 17mil ($200 \pm 25 \mu\text{m} \times 440 \pm 25 \mu\text{m}$)
- Thickness: 3.9mil ($100 \pm 10 \mu\text{m}$)
- Anode pad: $126 \pm 10 \mu\text{m} \times 151 \pm 10 \mu\text{m}$
- Cathode pad: $126 \pm 10 \mu\text{m} \times 151 \pm 10 \mu\text{m}$

(2) Metallization

- Electrode pad: Au

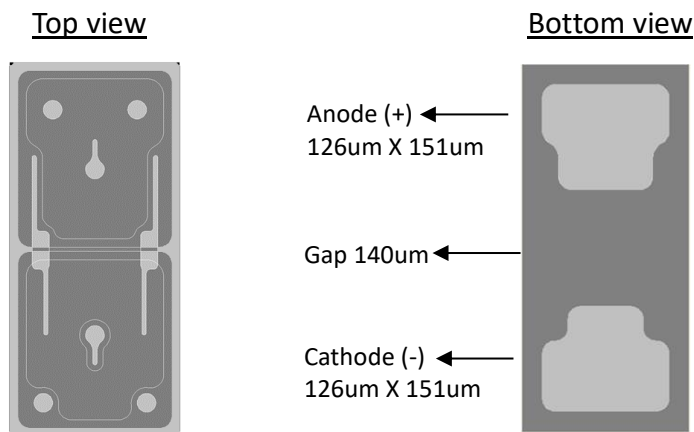

Features:

- Compatible with Solder Process
- High Power Density
- Low Rth and Long life time

Applications:

- Backlight

> Electro-optical Characteristics at 25°C: ⁽¹⁾

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	Vf1	If = 10μA	4.4	-	-	V
	Vf2	If = 5mA	-	5.5	5.7	V
Dominant Wavelength ⁽²⁾	λ_d	If = 5mA	445	-	466	nm
Spectra Half-width	$\Delta\lambda$	If = 5mA	-	15	-	nm
Radiant Flux ⁽³⁾⁽⁴⁾	Po	If = 5mA	11.0	-	11.5	mW
			11.5	-	12.0	
			12.0	-	12.5	
			12.5	-	13.0	
			13.0	-	13.5	
			13.5	-	14.0	

Note:

(1) ESD protection during chip handling is recommended.

(2) Basically, the wavelength span is 21nm; however, customers' special requirements are also welcome.

(3) Radiant flux is determined by EPISTAR standard.

(4) Radiant flux measurement allows a tolerance of $\pm 15\%$.

> Absolute Maximum Ratings:

Parameter	Symbol	Condition	Rating	Unit
Forward DC Current	If	Ta = 25°C	≤ 37	mA
Junction Temperature	Tj	-	≤ 115	°C
Storage Temperature	Tstg	Chip	-40 ~ +85	°C
		Chip-on-tape/storage	5 ~ 35	°C
		Chip-on-tape/transportation	-20 ~ +65	°C
Temperature during Packaging	-	-	260(<5sec)	°C

Note: Maximum ratings are package dependent. The above maximum ratings were determined using by EPISTAR standard. Forward current and junction temperature will cause the damage of LEDs if over the absolute maximum ratings.

> Characteristic Curves:

Fig.1 – Relative luminous Intensity vs. Forward Current

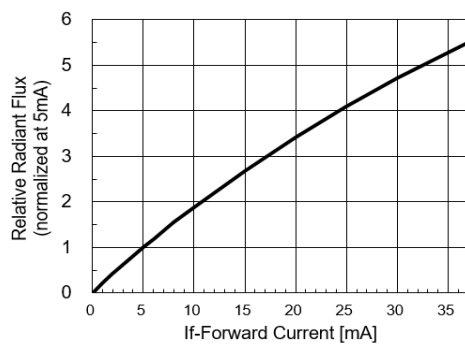


Fig.2 – Forward Current vs. Forward Voltage

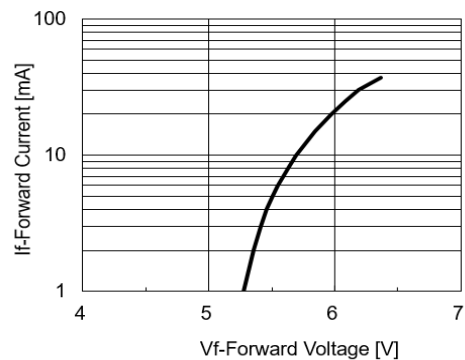


Fig.3 – Relative Intensity (@5mA) vs. Ambient Temperature

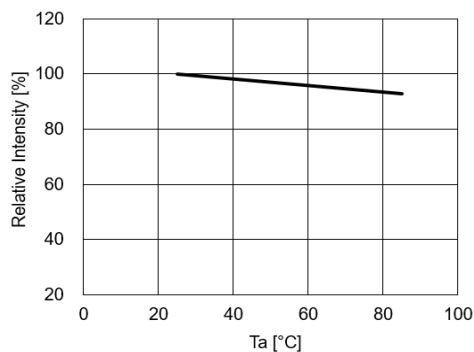


Fig.4 – Forward Voltage (@5mA) vs. Ambient Temperature

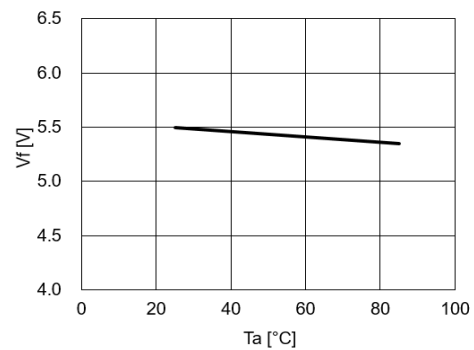


Fig.5 – Dominant Wavelength (@5mA) vs. Ambient Temperature

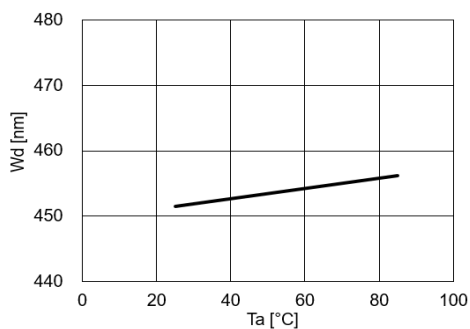


Fig.6 – Maximum Driving Forward DC Current vs. Ambient Temperature (De-rating based on Tj max. = 115°C)

