



### > Mechanical Specification:

#### (1) Dimension

- Chip size: 14 mil x 14 mil (340±25 µm x 340±25 µm)
- Thickness: 8.8 mil (225±25 µm)
- N bonding pad: 4.5 mil (115±10 µm)

#### (2) Metallization

- Topside N electrode: Au alloy
- Backside P electrode: Au alloy



#### Features:

- High luminous intensity
- Thin film structure
- Vertical electrode
- High driving current

#### Applications:

- Outdoor display
- Traffic signal

### > Electro-optical Characteristics at 25°C:

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	Vf1	If = 10µA	1.3	-	-	V
	Vf2	If = 20mA	-	2.1	2.5	V
Reverse Current	Ir	Vr = 10V	-	-	5.0	µA
Peak Wavelength	λp	If = 20mA	-	621	-	nm
Dominant Wavelength <sup>(1)</sup>	λd	If = 20mA	610	-	620	nm
Spectra Half-width	Δλ	If = 20mA	-	18	-	nm
Luminous Intensity <sup>(2)(3)</sup>	Iv	If = 20mA	950	-	-	mcd
			1050	-	-	
			1150	-	-	
			1250	-	-	

Note:

(1) Basically, the wavelength span is 10nm; however, customers' special requirements are also welcome.

(2) Customers' special requirements are also welcome.

(3) Luminous intensity is measured by EPISTAR's equipment on bare chips.

## > Absolute Maximum Ratings:

Parameter	Symbol	Condition	Rating	Unit
Forward DC Current	If	Ta = 25°C	≤ 70	mA
Reverse Voltage	Vr	Ta = 25°C	≤ 10	V
Junction Temperature	Tj	-	≤ 115	°C
Storage Temperature	Tstg	Chip	-40 ~ +85	°C
		Chip-on-tape/storage	5 ~ 35	°C
		Chip-on-tape/transportation	-20 ~ +65	°C
Temperature during Packaging	-	-	280(<10sec)	°C

Note: Maximum ratings are package dependent. The above maximum ratings were determined using a Printed Circuit Board (PCB) without an encapsulant. Stresses in excess of the absolute maximum ratings such as forward current and junction temperature may cause damage to the LED.

## > Characteristic Curves:

Fig.1 – Relative luminous Intensity vs. Forward Current

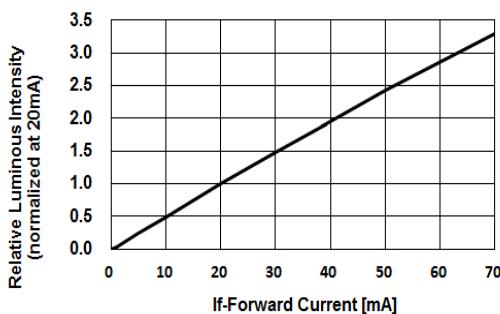


Fig.2 – Forward Current vs. Forward Voltage

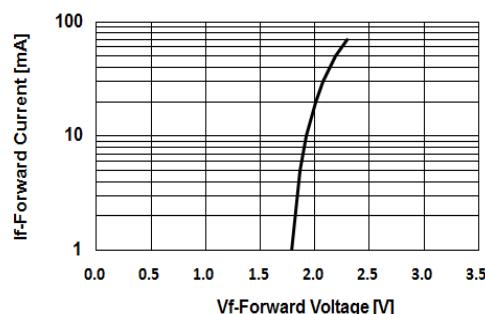


Fig.3 – Relative Intensity (@20mA) vs. Ambient Temperature

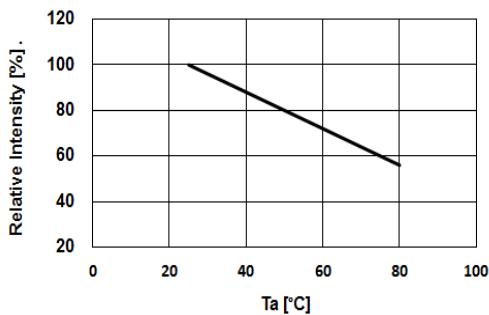


Fig.4 – Forward Voltage (@20mA) vs. Ambient Temperature

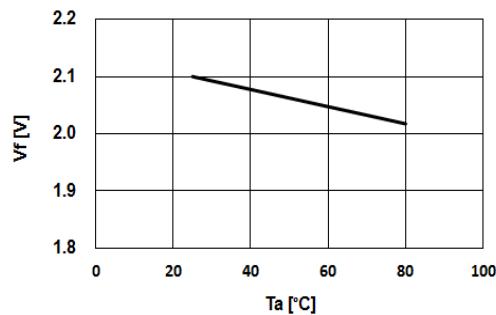


Fig.5 – Dominant Wavelength (@20mA) vs. Ambient Temperature

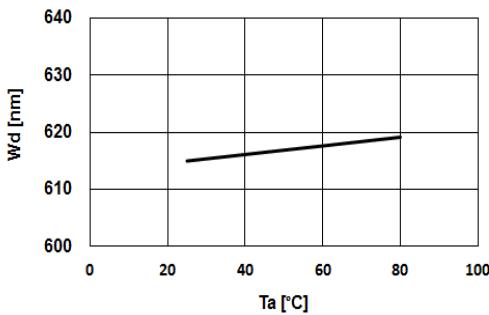


Fig.6 – Maximum Driving Forward DC Current vs. Ambient Temperature (De-rating based on Tj max. = 115°C)

